


Communications Center


Equipment Room
Concept #1

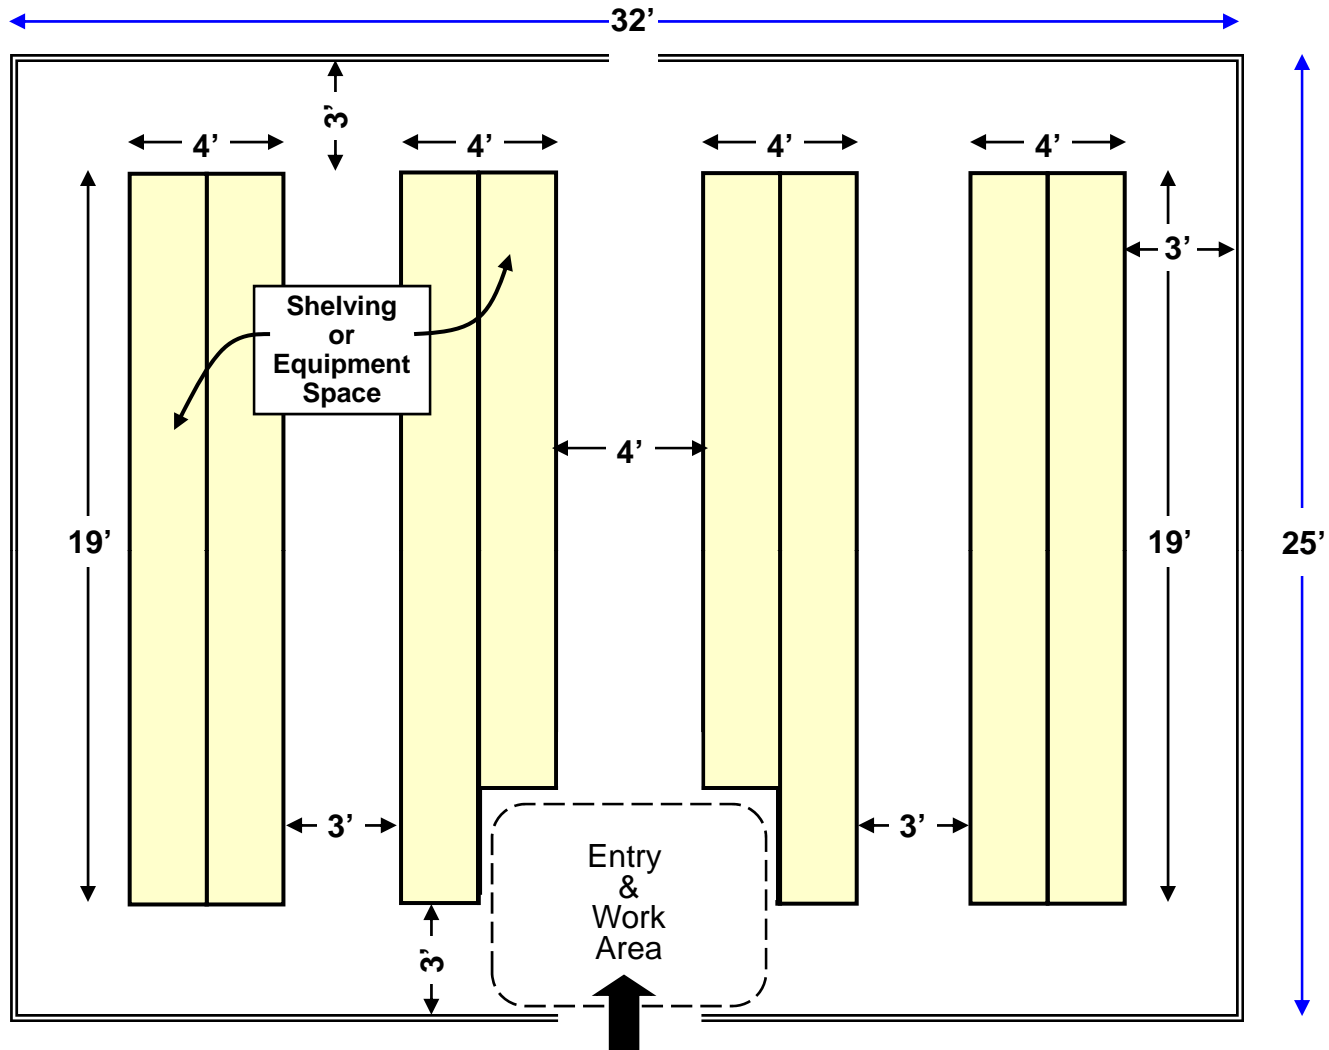

- 3' walkways around/all shelving & equipment placements
- Front Entrance work area @ +/- 48 SF
- Shelving can be 2' deep back-to-back or 4' deep
- Total net floor space for shelves or equipment approx. 304 SF
- Potential area for shelving @ 4 shelves high = 304 linear ft. of 4' deep shelving or 608 linear ft. of 2' shelving

Communications Center

Equipment Room
Concept #2

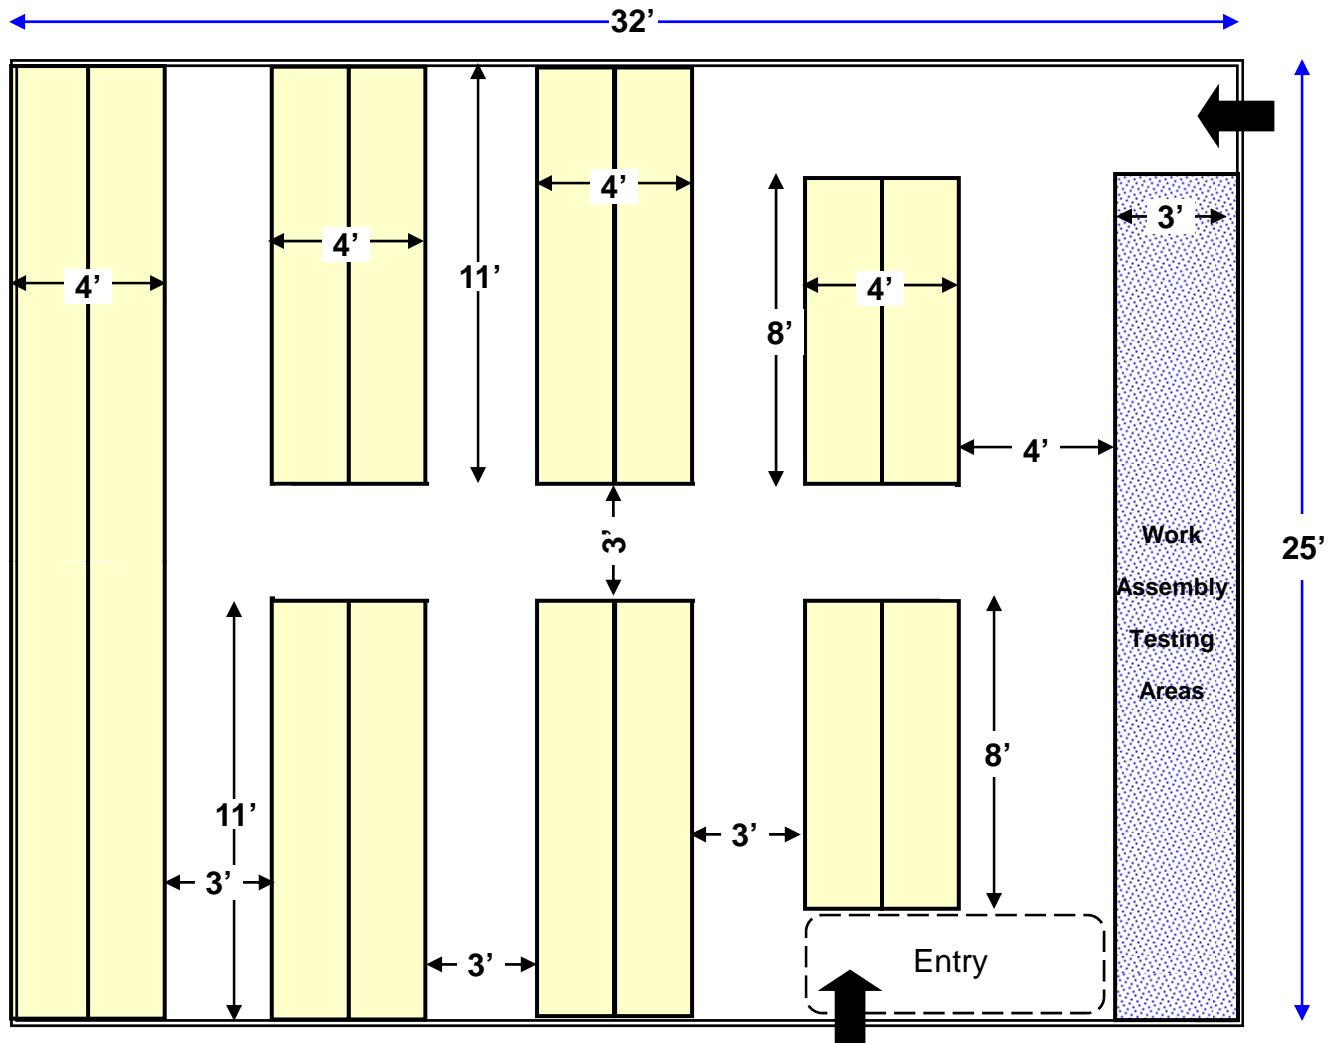

- 3' walkways around most shelving & equipment placements
- 2 entrances; conceivably one from within Call Center; one accessible to/from elevator lobby
- Est. 3' x 22' work, assembly, & testing area(s)
- Shelving can be 2' deep back-to-back or 4' deep
- Total net floor space for shelves or equipment 340 SF
- Potential area for shelving @ 4 shelves high = 340 linear ft. of 4' deep shelving or 680 linear ft. of 2' shelving