



1. SEE SHEET S1.3 FOR DESIGN CRITERIA, GENERAL
STRUCTURAL NOTES & SCHEDULES.
2. TOP OF SLAB REFERENCE ELEVATION = 0'-0" UNLESS
OTHERWISE NOTED. SEE ARCHITECTURAL AND CIVIL
DRAWINGS FOR ADDITIONAL INFORMATION.
3. CONCRETE FLOOR SLAB IS 8" THICK WITH #4 @ 12" O.C.
AYE WAY 3" CLEAR FROM BOTTOM, PROVIDE 10 MIL
VAPOR BARRIER AND 8" COMPACTED GRANULAR BASE
UNDER SLAB. SEE DETAIL 1/S/2.1
4. SEE DETAIL 12/S1.2 FOR TYPICAL FOOTING STEP.
5. FOR FOOTING, BASE PLATE AND ANCHOR BOLT DETAIL
SEE SCHEDULE OF MATERIALS.
6. SEE 4/S1.2 FOR SLAB CORNER REINFORCEMENT. U.N.O.
SEE CIVIL DRAWINGS FOR ADDITIONAL INFORMATION.

FOOTING SCHEDULE			
MARK	FTG. SIZE	REINFORCEMENT	REMARKS
F5.0	5'-0" x 5'-0" x 1'-6"	6 - #4 EACH WAY, TOP. 6 - #6 EACH WAY, BOT.	WITH 24"x24" PEDESTAL
F6.0	6'-0" x 6'-0" x 1'-6"	6 - #4 EACH WAY, TOP. 6 - #6 EACH WAY, BOT.	WITH 24"x24" / 24"x32" PEDESTAL

NOTE:
1. S.W.=> SHORT WAY. 2. L.W.=> LONG WAY. 3. E.W.=> EACH WAY


[illegible]

RPA ENGINEERING, P.A.
Structural Engineering Solutions

Engineering License Certificate No. C-2734

1 Commerce Square,
Suite 202
Washington, NC 27889

Phone : 252-321-0027
Fax : 252-355-2179

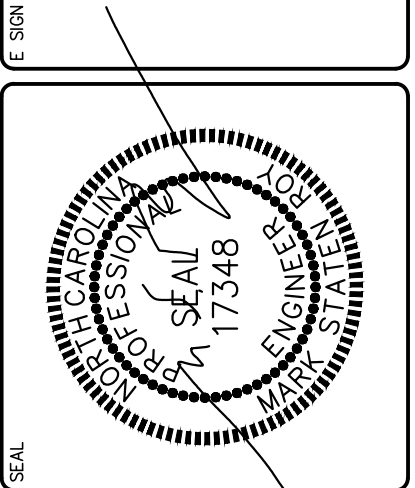

CATAWBA COUNTY - BLACKBURN
RESOURCE RECOVERY FACILITY

DRAWING TITLE

SLAB PLAN
PLAN NOTES &
SCHEDULES

PROJ. NO. 2025033

DATE		
05.15.2025		
DRAWN	CHECKED	APPROVED
GBP	MSR	MSR
SHEET NO.		

S1.1

